www.europomice.com info@europomice.it

DRIED PUMICE 0-200 µm

COMPOSTION: NATURALLY EXPANDED AND KILN DRIED ALVEOLAR MAGMATIC MINERAL
PUMICE is the result of the natural extension of effusive magmatic mineral that has generated an alveolar product of remarkable lightness, with high porosity, great water retention, slow release of liquids and thermal and acoustic insulating properties.
The advantage of having a naturally expanded lightweight product involves maintaining the open cell alveolar structure, a unique feature of the pumice extracted in the Tuscany and Lazio mining area.
The subsequent kiln drying and screening enables a product, DRIED PUMICE, to be obtained that is free from natural humidity and suitable for many fields of application.

FIELDS OF APPLICATIONS	
LIGHTWEIGHT INERT FOR MORTARS AND PREMIXED PRODUCTS	SUPPORT FOR CHEMICAL PRODUCTS, PAINTS AND VARNISHES, STUCCOES AND ADHESIVES
FILTRATION AND ABSORBATION OF INDUSTIAL OILS AND LIQUIDS	SOFT ABRASIVES
PAINTS AND COATINGS	THERMAL INSULATION AND DEHUMIDIFYING PLASTERS
HAND CLEANER PASTE	DENTISTRY

PHYSICAL AND CHEMICAL PROPERTIES:
Thermal conductivity: λ = 0,11 W/(mK) (1)
Thermal and acoustic insulating
Transpiration
Excellent workability
Fire-resistant
Durability
Apparent density: 550 - 600 Kg/m^3
Residual moisture: < 2 %
Residue greater than 200 µm: 1%

LIQUID ABSORPTION
For 100 or of dried Pumice:

Water	approx. 100 gr
Lubricant oil	110 gr
Diesel fuel and Gasoline	80 gr

MEDIUM CHEMICAL ANALYSIS of representative samples of the front quarry	
SiO_2	56,8 % ± 5 %
Al_2O_3	18,8 % ± 5 %
K_2O	8,0 % ± 5 %
Fe_2O_3	4,2 % ± 5 %
CaO	4,5 % ± 5 %
Na_2O	1,9 % ± 5 %
TiO_2	0,5 % ± 5 %
MgO	1,6 % ± 5 %
P_2O_5	0,1 % ± 5 %
MnO	0,1 % ± 5 %
P.F.	3,9 % ± 5 %
pH	7-8

***Imperial Measurements**: Grain size: 70- US Mesh. Apparent density 34.34-37.46 lb/ft^3. Residue greater than 125 US Mesh 1%. Liquid absorption for 0.22 lb. of Dried Pumice: approx. Water 0.22 lb. - Lubricant oil 0.24 lb.- Diesel fuel and Gasoline 0.18lb.*

Mineral containing no active limestone and no Free Crystalline Silica

GRAIN SIZE CURVE:

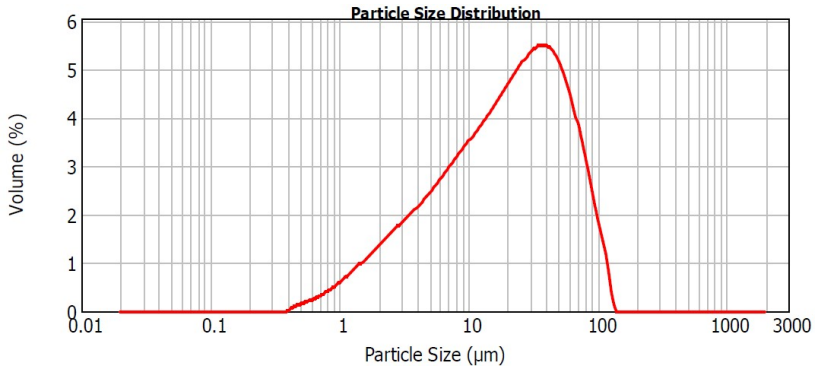

AVAILABLE BULK, in BIG-BAGS of 550 kg (1213 *lb*), in BAGS of 20 kg (44.09 lb/each)
STORAGE: store the product in a sheltered and dry place

This mineral is a natural raw material. All data indicated above are average production values and do not provide any warranty.

(1) Certificated by Politecnico of Torino n. 1447/04
(2) The specific weight is indicative and is referring to average values in batches of industrial production. Possible variations are a result of potential phenomena of segregation between the fine and gross parts.